

SINGLE-CHANNEL 12G/3G SDI AND ETHERNET TRANSPORT

PBX-SC-155-12G / PBX-SC-155 is standalone fiber converter for transporting **4K (12G index only)**, **3G-SDI**, **HD-SDI**, **SD-SDI**, **ASI**.

Automatic Rx or Tx configuration based on the type of SFP installed by customer.


Device has optional **Gigabit Ethernet** fiber media converter.

FEATURES

BNC I/O mode indicator

Video SFP up to 120 km link distance

Case dimensions 100 x 100 x 33.5 mm

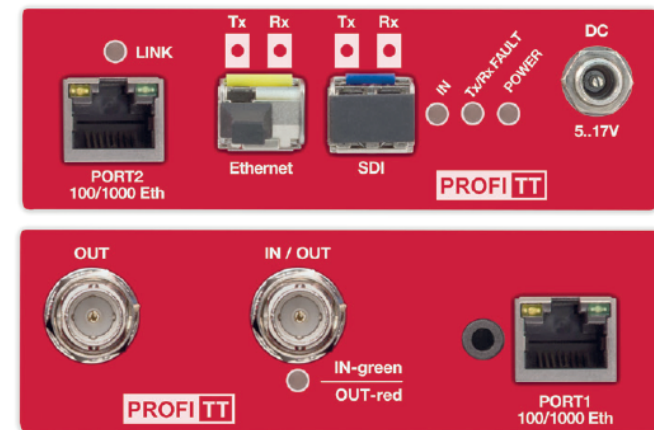

▶ **SUPPORTS 12G/3G/HD/SD SDI, ASI**

▶ **HOT PLUGGABLE OPTICS**